

# JVS-D6016-4HD


## 4CH Decoder



### Key Features

- 4x HDMI Output (Decode 4 Screens Video Wall, Multiple Screens Can Be Spliced).
- 8CH of 5.0MP, 12CH of 4.0MP, 16CH 1080P Decoding Capability.
- Each Output Supports 1/4/8/9/16 Split Screen.
- Support Multi-screen TV-wall, Screen Merging and Sequencing

### Description

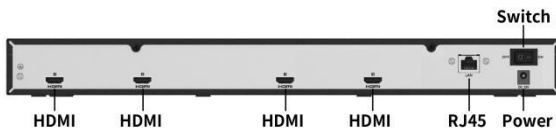

Specifications	
Model	JVS-D6016-4HD
Hardware	
<b>Decoding Ability</b>	8CH 5.0MP@30fps, 12CH 4.0MP@30fps, 16CH 1080P@30fps
<b>Video Output</b>	4x HDMI. Support 4K Output
<b>Ethernet</b>	1x RJ-45, 10/100/1000Mbps Adaptive
Features	
<b>TV Wall Configuration and Management</b>	Support remote configuration and management of the video wall through the client. Screen position detection, display output number; Support search decoder.
<b>Live Video Wall</b>	Support
<b>Video Wall Playback</b>	Support
<b>Video Wall Sequence</b>	Support set the sequence according to the plan
<b>PTZ Control</b>	Support
<b>Window Splicing</b>	Support. Maximum support 4 or more screens arbitrary splicing. After splicing, it supports split screen. Number of split screen is as follows: 1/4/6/8/9/16
<b>Window Roaming</b>	Support.. Support up to one window
<b>Window Zoom</b>	Window Zoom
<b>Video Compression</b>	H.265/H.264/ MPEG4/MJPEG
<b>Audio Compression</b>	G.711
<b>Screen Split</b>	1/4/8/9/16
<b>Hybrid Decoding</b>	Support
<b>RTSP Streaming</b>	Support RTSP Streaming From Remote Device.
<b>Language</b>	Support English/Chinese
<b>Virtual Banner</b>	Support. Font Size, Color, Background Can Be Set
<b>Output Resolution</b>	Maximum Support 4K Output
<b>Configuration</b>	Network Configuration (Modify IP), Local Upgrade, Factory Restoration
<b>Device Management</b>	Support Device Search (Protocol Support 1.0, 2.0 ONVIF), Add, Delete, Group
<b>Software Projection</b>	Support
<b>Hardware Projection</b>	Support
<b>Scene Management</b>	Support. Save the Scene For Easy Use
<b>Set Background</b>	Support.
<b>Access Protocol</b>	CloudSEE Private Protocol/ ONVIF Protocol, Support ONVIF IPC/NVR Access
General	
<b>Power Supply</b>	DC 12V
<b>Consumption</b>	≤18 W
<b>Working Temperature</b>	-10°C ~ 55°C
<b>Working Humidity</b>	10% ~ 90%
<b>Dimensions</b>	445x45x325(mm)
<b>Weight</b>	≤3.13Kg