

# JVS-N4242


4MP Vandalproof Dome PoE IP Camera



## Key Features

- Resolution 2560x1440@25fps
- Starlight function
- 4mm Lens with wide viewing angle
- 35x IR-LED, up to 20 Meters
- Ingress Protection IP66
- Motion Detection with Email Alert
- CloudSEE Embedded
- ONVIF 2.4, Compatible with ONVIF Recorder

## Dimension(mm)

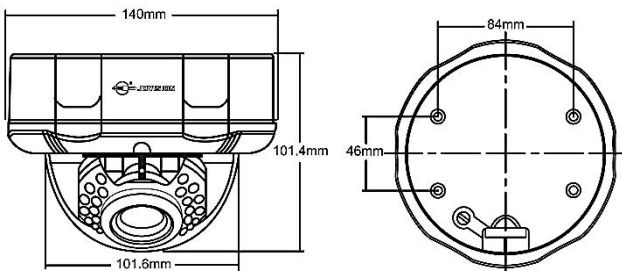

## Accessories



JVS-AU1002



JVS-AU1003

## Specifications

Model	JVS-N4242
<b>Video</b>	
Image Sensor	1/3" CMOS Sensor
Max. Resolution	2560x1440
Effective Pixels	4.0MP
Video Compression	H.265
Framerate	25fps
Bitrate	128Kbps~8Mbps
Illumination	0Lux (IR ON)
<b>Lens</b>	
Lens	4mm
Viewing Angle	H: 79.6°, V: 47.7°, D: 97.8°
IR-Distance	Up to 20m.
IR-LEDs	35Pcs
<b>Function</b>	
Exposure Control	Auto
White Balance	Auto
Image Enhancement	3D DNR
Advanced OSD	Support OSD large font function, OSD flashing on alarm, OSD and time to set the position separately
Motion Detection	Support
Image Setting	Rotate, Saturation, Brightness, Contrast, Sharpness
Day and Night Function	Day and night automatic switching
Privacy Mask	Support
Intelligent Analysis	Not Support
Alarm Method	Email Alarm, Client Alarm
Remote Operation	System, Audio and video, Image, Alarm, Network management
Starlight	Support
<b>Network</b>	
Ethernet	1x RJ45 10M / 100M Ethernet
Stream	3x Streams
Protocols	HTTP, TCP/IP, UDP, ICMP, RTSP, RTP, RTCP, SMTP, DHCP, DNS
Interoperability	ONVIF 2.4
Network Transmission	CloudSEE 2.0
Browser	IE8+, Chrome18+, Firefox5.0+, Safari5.02+
User	Up to 13 Users
App	Support iOS/Android
<b>General</b>	
Power Supply	DC12V/2A, PoE IEEE 802.3af
Consumption	<3W (During day); <7W (At night)
Working Temperature	-20°C ~ 60°C
Working Humidity	10% ~ 90% Rh
Material	Aluminum
Dimension	139.9x101.4mm
Weight	720g
Waterproof	IP66