

JVS-N43-Z25


4MP 25x Zoom Starlight AI PTZ Camera



Key Features

- 1/3" Progressive Scan CMOS
- 4.0 Megapixels
- 25X Optical Zoom
- With Starlight Function
- 3D DNR, HLC/BLC
- Humanoid Intelligent Tracking
- Waterproof IP66

Dimension(mm)

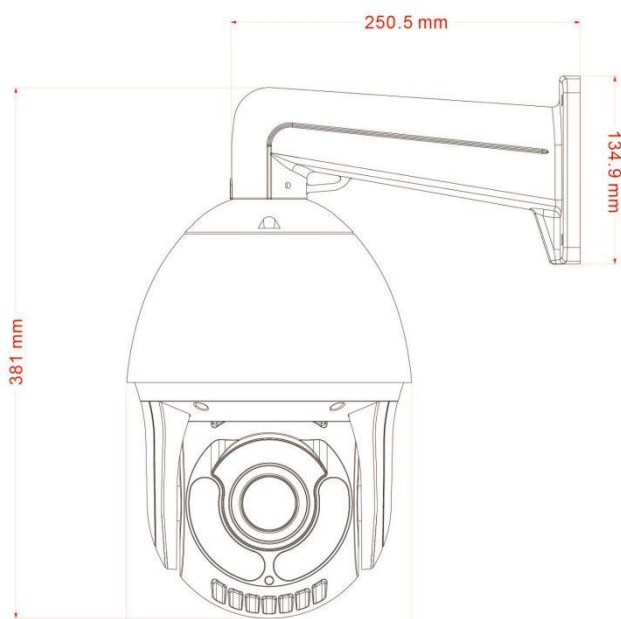

Specifications

Model	JVS-N43-Z25
Camera	
Image Sensor	1/3" Progressive Scan CMOS
Max Resolution	2496x1440
Effective Pixels	4.0 Mega Pixels
Optical Zoom	25x Zoom
Compression Standard	H.264/H.265
Maximum Frame Rate	Up to 25 fps
Bit Rate	267Kbps~8Mbps
Illumination	0 Lux (IR ON)
Focus Control	Auto/ Semi-auto/ Manual
Focus Length	Optical Zoom 25X
Infrared	4 Infrared Lights + 4 Laser Lights
IR Distance	≥120m.
Function	
OSD	Support
DWDR	Support
Smart Defog	Support
ROI	Support
Motion Detection	Support
Video Adjust	Supports Contrast, Brightness, Saturation, Sharpness Adjustment
Audio	Support Audio monitoring, Intercom
Image Setting	Mirror, Rotate
Alarm	E-mail, Client
Network Protocols:	HTTP, TCP/IP, ICMP, RTSP, RTP, UDP, RTCP, SMTP, DHCP, DNS, CloudSEE.
System Compatibility	ONVIF 2.4
Remote Operation	System, Stream, Alarm, Network, Storage, Management, PTZ Function, Insight
PTZ	
Pan/Tilt Range	Pan: 0°~360°; Tilt: 0°~90°
Pan Speed	0°~30°/S
Tilt Speed	0°~20°/S
Manual Speed	High, Middle, Low
Number of Preset	1024
Patrol	Up to 2 Patrols
Scan	Patrol Scan, Pattern Scan, Tilt Scan, Frame Scan, Random Scan
Control	RS232
Communication	
Communication Protocol	Pelco-D
Communication Interface	RS232
Baud Rate	1200/2400/4800/9600bps
Interface	
Ethernet	1 RJ45 10M / 100M Ethernet
Audio I/O	1CH Audio In
General	
Power Supply	DC12V/3.33A
Power Consumption	≤ 25W
Operating Temperature	-20°C ~ +60°C
Operating Humidity	0% - 93% Rh Non-Condensation
Ingress Protection	IP66
Product Dimensions	205x 325X389 (mm)
Product Weight	≤ 2490(g)