

JVS-N5022


5MP Vandalproof Starlight PoE IP Camera



Key Features

- Resolution 2592x1944@20fps
- Ingress Protection IP66
- PoE IEEE 802.3af
- 18x IR-LED, up to 20 Meters
- Supports CloudSEE APP on iOS/Android
- ONVIF 2.4, Compatible with ONVIF Recorder

Dimensions(mm)

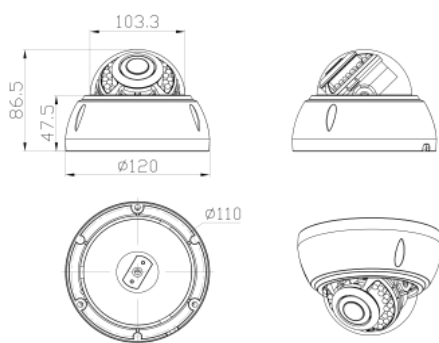

Accessories



AU1004

Specifications

Model	JVS-N5022
Video	
Image Sensor	1/ 3" CMOS Sensor
Max. Resolution	2592x1944
Effective Pixels	5.0MP
Compression Standard	H.265
Framerate	20fps
Bitrate	128Kbps ~ 8Mbps
SNR (dB)	38.6db
Illumination	0Lux (IR ON)
Lens	
Lens	2.8 mm
Viewing Angle	H 88.5°, V 65.3°, D: 107.2°
IR-LEDs	14μ 18x LEDs
IR-Distance	Up to 20m.
Function	
Exposure Control	Auto
White Balance	Auto
Image Enhancement	3D DNR
Advanced OSD	Support OSD large font function, OSD flashing on alarm, OSD and time to set the position separately
Motion Detection	Support
Image Setting	Rotate, Saturation, Brightness, Contrast, Sharpness
Day and Night Function	Day and night automatic switching
Privacy Mask	Support
Intelligent Analysis	Not Support
Alarm Method	Email Alarm, Client Alarm
Remote Operation	System, Audio and video, Image, Alarm, Network management
Network	
Ethernet	1x RJ45 10M / 100M Ethernet
Stream	2x Streams
Protocols	HTTP, TCP/IP, UDP, ICMP, RTSP, RTP, RTCP, SMTP, DHCP, DNS
Interoperability	ONVIF 2.4
Network Transmission	CloudSEE 2.0
Browser	IE8+, Chrome18+, Firefox5.0+, Safari5.02+
User	Up to 13 Users
App	Support iOS/Android
General	
Power Supply	DC12V/2A, PoE IEEE 802.3af
Consumption	<3W (During day); <7W (At night)
Working Temperature	-20°C ~ 60°C
Working Humidity	10% ~ 90% Rh
Material	Aluminum
Dimensions	120x90mm
Weight	500g
Waterproof	IP66