


# JVS-N513-DS-Z5

5MP 5X Motorized Zoom Bullet IP Camera



## Key Features

- 1/2.8" SONY Progressive Scan CMOS
- 5.0 Megapixel, 2592x1944 @30fps
- 2.7 ~ 13.5mm (Motorized) lens, 3Pcs IR Array LED for 30., IR ON 0 Lux
- Support ONVIF Profile S, FTP, RTSP, UPnP etc.
- Support Dual-Stream, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc.
- Support Audio I/O, One alarm input and output, RS485, SD card (Max. 256G), RJ45, DC 12V

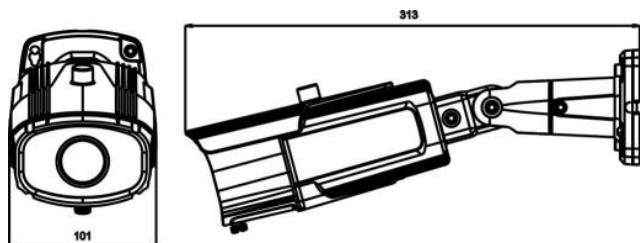

## Specifications

Model	JVS-N513-DS-Z5
<b>Video</b>	
Image Sensor	1/2.8" Progressive Scan CMOS
Max. Resolution	2592x1944
Effective Pixels	5.0MP
Compression Standard	H.265/ H.264/ MJPEG
Bitrate	30Kbps~16Mbps
Bitrate Control	CBR/ VBR
<b>Lens</b>	
Lens	2.7 ~ 13.5mm
Lens Type	Motorized
<b>Function</b>	
Image Function	AEC/ AWB/ AGC
Image Adjustments	Color Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR
Others	Anti-Fogging/ Anti Trembling/ IR Detection
Image Settings	Flip / Mirror
Video Overlay	Support
Privacy Mask	4 Zones
Storage	Max. 256GB
Alarm I/O	1x Alarm-In, 1x Alarm-Out
RS485	1x RS485 interface
Audio	1 input (3.5mm AV interface), 1 output (3.5mm AV interface)
Audio Compression	G.711A/ G.711U/ G.726
Two-way Audio	Support
<b>Network</b>	
Ethernet	1x RJ45 (10M/100M BASE-TX)
Protocols	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP
Alarm output	E-mail/FTP upload
Interoperability	ONVIF (Profile S)
Browser	IE 10 above
Max. User Access	Max. 5
<b>General</b>	
Power	DC12V ±10% / IEEE802.3af PoE
Environmental Casing	Aluminum Alloy Housing, Indoor and Outdoor Applicable
Installation	Ceiling Mounted & Wall Mounted
Power Consumption	<12W (IR On)
Operating Temperature	-30°C ~ 60°C
Operating Humidity	0% ~ 85% Rh
Dimensions	313x101x70mm
Weight	965g