

JVS-ND7008-PD01


8CH H.265 PoE NVR



Key Features

- Full HD Video Output.
- 8CH IEEE802.3af PoE
- Supports 8CH 5.0Megapixel IP Cameras
- H.265 Video Compression
- ONVIF 2.4 Standard, Compatible with ONVIF IP Cameras
- Support CloudSEE on PC and Smart Phone, iOS/Android
- With Digital Zoom, Privacy Mask Functions.

Description

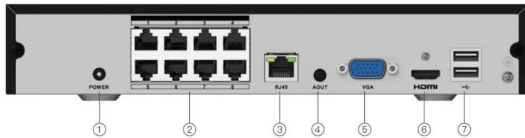

Index	Description	Index	Description
①	POWER	⑤	VGA
②	IEEE802.3af PoE	⑥	HDMI
③	RJ45	⑦	USB
④	Audio Out		

Specifications

Model	JVS-ND7008-PD01
Video and Audio	
IP Camera Input	8CH PoE cameras upto 5MP+8CH Non-PoE cameras upto 5MP
Audio Input/ Output	1CH Output 3.5mm; Audio output support HDMI
Bandwidth I/O	60Mbps/40Mbps
Display	
Interface	1 HDMI, 1 VGA
Resolution	HDMI: 3840x2160, 1920x1080, 2560x1440, 1440x900, 1280x1024, 1280x720, 1024x768 VGA: 1920x1080, 1440x900, 1280x1024, 1280x720, 1024x768
Multi-screen Display	Port binding 1/4/5/6/7/8/9 Non-port binding 1/4/5/6/7/8/9/10/11/12/13/14/15/16
OSD	Camera Name & Time, Recording, Alarm Detecting, Remote connection, Volume, Channel Number
Recording	
Compression	H.265/H.264
Resolution	8CH 5.0MP/4.0MP/1080P/960P/720P
Record Mode	Manual, Schedule, MD
Video Detection and Alarm	
Trigger Events	Recording, Snapshot, PTZ, Voice, E-mail, Client, Buzzer
Video Detection	Motion Detection, No Video Detection
Playback and Backup	
Sync Playback	2CH 5.0MP/ 3CH 4.0MP/ 4CH 3.0MP
Search Mode	Time /Date, Schedule, Motion Detection
Playback Function	Day View, Hour View, Back Step, Rewind, Pause, Play, Fast Forward, Slow, Step, Full Screen, Snap, Sound On/Off, Zoom
Backup Mode	USB Device/Network
USB	2x USB2.0
Network	
Interface	1 RJ-45 port (10/100/1000Mbps)
PoE Interface	8 Port 100Mbps IEEE802.3af PoE
Network Function	TCP/IP, DHCP, UDP, SMTP, NTP
Smart Phone	iPhone, Android
Interoperability	ONVIF 2.4
Storage	
SATA	1x SATA interface
Capacity	up to 10TB
General	
Power Supply	48V DC
Consumption	≤ 120 W (Without HDD)
Working Temperature	-10°C~ 55°C
Working Humidity	10 % ~ 90 %
Dimensions	260x219x45mm
Weight	≤ 1.05Kg (Without HDD)