

JVS-ND912816-H-XM


128CH 16*HDD H.265 NVR



Key Features

- Support 4K Video Output
- Support 128CH 5.0Megapixel IP Cameras
- 16x SATA, Up to 10TB Each
- 2x HDMI, 2x VGA, 2x RJ45
- Support Audio Input and Output
- Support Alarm Input and Output. 16 In & 4 Out
- Support RS485
- Support Dual Network Port, Network Fault Tolerance and Load Balancing

Description

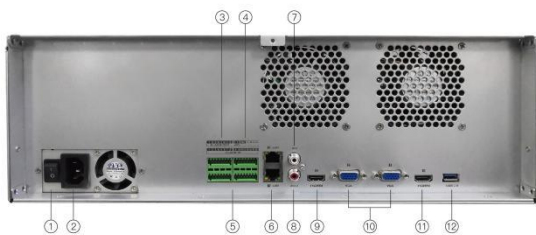

Index	Description	Index	Description
①	Switch	⑦	Audio In
②	Power	⑧	Audio Out
③	Alarm Out	⑨	HDMI
④	RS-485	⑩	VGA
⑤	Alarm In	⑪	HDMI
⑥	RJ45	⑫	USB 3.0

Specifications

Model	JVS-ND912816-H-XM
Video & Audio	
IP Camera Input	128 Channel
Video Output	HDMI: 4K@60Hz/ 4K@30Hz/ 2K@60Hz/ 2K@30Hz/ 1920x1080/ 1440x900/ 1280x1024/ 1280x720/ 1024x768 VGA: 1920x1080/ 1440x900/ 1280x1024/ 1280x720/ 1024x768
Audio In & Out	Support
Compression	H.265/ H.264
Video Access	128CH 5.0MP
Bandwidth I/O	500Mbps/320Mbps
Storage	
SATA	16 x SATA Interface
Capacity	Up to 10TB Max.
File Format	Log: *.txt/ Picture: *.JPG/ Video: *.mp4
Backup Mode	Support USB/ Portable HDD FAT32/ NTFS/ exFAT
Video	
Video Playback	Auto/ Timing/ Alarm/ Motion Detection/ Intelligent Analysis
Sync Playback	9CH 5.0MP (20fps)/ 11CH 4.0MP/ 13CH 3.0MP/ 16CH 2.0MP
Search Mode	Channel Number/ Recording Type/ Date
Network	
Ethernet	100/1000Mbps Adaptive
Max. Remote Channels	128 LAN/ 64 WAN
Network Function	TCP/IP, UDP/IP, CloudSEE, SMTP, NTP, DHCP
Interoperability	ONVIF Standard, CloudSEE 2.0
Smart Phone	iPhone, Android
Hardware	
Network Interface	2x RJ45
USB Interface	2x USB2.0, 1xUSB3.0
PTZ Interface	RS485
Controlling Device	Mouse / Front panel
Alarm Input	16CH
Alarm Output	4CH
Special	
Multi-Screen Display	1/ 4/ 5/ 6 up to 64 x 2
Alarm Method	Email Alarm, External Alarm
Digital Zoom	Support
General	
Power Supply	100-240V/6-3A/60-50HZ
Consumption	≤ 10 W (Without HDD)
Working Temperature	-10°C ~ 55°C
Working Humidity	10% ~ 90%
Dimensions	530x144x483(mm)
Weight	≤ 6.2Kg (Without HDD)